

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
YO998-525

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application and invention entitled:

**MESSAGE LOGGING FOR RELIABLE MULTICASTING ACROSS A ROUTING NETWORK**

and invented by:

**Guruduth Somasekhara Banavar, Tushar Deepak Chandra, Kevan Lee Miller, Robert Evan Strom, Daniel Charles Sturman and Michael James Ward**

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 47 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
Y0998-525

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

- a. ☒ Formal                      Number of Sheets                      Ten (10)
- b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_

4. ☒ Oath or Declaration

- a. ☒ Newly executed (original or copy)                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☒ Certificate of Mailing

☐ First Class                      ☒ Express Mail (Specify Label No.): EL339142538US

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
Y0998-525

Total Pages in this Submission

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☒ Additional Enclosures (please identify below):


Associate Power of Attorney (2 pp.)

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	50	- 20 =	30	x \$18.00	\$540.00
Indep. Claims	8	- 3 =	5	x \$78.00	\$390.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,690.00

- ☒ A check in the amount of \$1,690.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 08-1935 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Kevin P. Radigan, Esq.  
Reg. No. 31,789  
HESLIN & ROTHENBERG, P.C.  
5 Columbia Circle  
Albany, NY 12203  
Tel.: (518) 452-5600  
Fax: (518) 452-5579

Dated: March 30, 1999

CC:

**MESSAGE LOGGING FOR RELIABLE MULTICASTING  
ACROSS A ROUTING NETWORK**

**Cross-Reference to Related Applications**

This application contains subject matter which is  
5 related to the subject matter of the following United States  
patent applications, which are assigned to the same assignee  
of this application. Each of the below-listed applications  
is hereby incorporated herein by reference:

10 "Routing Messages Within A Network Using The Data  
Content Of The Message," by Chandra et al., filed  
November 20, 1997, serial no. 08/975,303;

15 "Message Sequencing For Ordered Multicasting Of A  
Message Across A Routing Network," by Banavar et al.,  
co-filed herewith, serial no. , (attorney  
docket no. Y0998-526);

"Quiescent Reconfiguration Of A Routing Network,"  
by Miller et al., co-filed herewith, serial no. ,  
(attorney docket no. Y0998-527); and

20 "Non-Disruptive Reconfiguration Of A  
Publish/Subscribe System," by Miller et al., co-filed  
herewith, serial no. , (attorney docket no.  
Y0999-124).

## Technical Field

This invention relates in general to multicasting messages within a network and, in particular, to logging messages to persistent storage within a routing network to  
5 facilitate reliable delivery thereof to one or more clients. Further, the invention relates to reliably multicasting a message within a content-based routing network irrespective of destination information that may be included within the message.

## 10 Background of the Invention

Many network environments enable messages to be forwarded from one site within the network to one or more other sites using a multicast protocol. Typical multicast protocols send messages from one site to one or more other  
15 sites based on information stored within a message header. That is, each message has two components: the message header, which includes the routing information, including destination addresses or a predefined group name that is associated with a fixed list of destinations, and a data  
20 content, which is the data of the message. The routing information is read from the message header and is used to send the data content of the message to the specified destinations.

One example of a system that conventionally includes  
25 such a network environment is a publish/subscribe system. In publish/subscribe systems, publishers post messages and subscribers independently specify categories of events in which they are interested. The system takes the posted

messages and includes in each message header the destination information of those subscribers indicating interest in the particular message. The system then uses the destination information in the message to forward the message through  
5 the network to the appropriate subscribers.

In large systems, there may be many subscribers interested in a particular message. Thus, a large list of destinations needs to be added to the message header and used in forwarding the message. The use of the list, which  
10 can be even longer than the message itself, can degrade system performance. Other approaches have included the use of multicast groups, in which destinations are bound to a group name, and then that name is included in the message header. The message is then sent to all those destinations  
15 bound to the name. This technique has the disadvantage of requiring static groups of destinations, which restricts flexibility in many publish/subscribe systems.

### **Disclosure of the Invention**

A publish/subscribe system consists of a network of  
20 message routers (or simply routers) connected via links in an arbitrary graph topology. A number of clients connect to the periphery of this router network and either publish or subscribe to messages. A message consists of a number of attributes, which are name-value pairs. A subscription  
25 specifies a predicate on the attributes of messages.

The router network is responsible for routing messages from publishers to interested subscribers based on matching events to subscription predicates. One embodiment of this

routing protocol, referred to as content-based routing, is described in the above-incorporated co-pending patent application entitled "Routing Messages Within A Network Using The Data Content Of The Message." Content-based

5 routing proceeds as follows. From each router node at which a publisher is present, the system computes and stores a spanning tree to reach every other node in the network. All published messages from a particular publisher then follow the paths in the corresponding spanning tree, with each

10 router node performing enough matching to determine which of its child routers should receive the published message. All paths preserve a first-in first-out (FIFO) ordering on messages from any one publisher to all subscribers.

Briefly summarized, the present invention is directed

15 in one aspect to providing a mechanism for multicasting messages in a manner which is resilient to failures in the network, routers, or clients (e.g., publishers/subscribers). Resiliency is achieved by logging messages to persistent storage within the network prior to delivery thereof to one

20 or more clients.

More particularly, provided herein is a method for routing messages within a network. The method includes: receiving a message; and routing the message to one or more clients of the network, the routing being based on data

25 content of the message irrespective of any destination information that may be within the message, and being resilient to router or link failure within the network.

In another aspect, the invention comprises a method for routing messages within a network which includes: receiving

a message; logging the message to persistent storage within the network; and routing the message to one or more clients of the network after logging the message to persistent storage, wherein the logging is used to ensure resiliency in  
5 routing the message to one or more clients of the network notwithstanding failure at a router or link within the network.

In yet another aspect, a system of routing messages within a network is provided. The system includes means for  
10 receiving a message, and means for routing the message to one or more clients of the network. The routing is based on data content of the message irrespective of any destination information that may be within the message, and the means for routing is resilient to router or link failure within  
15 the network.

In still another aspect, a system of routing messages within a routing network is provided which includes means for receiving a message, means for logging the message to persistent storage within the routing network, and means for  
20 delivering the message to one or more clients of the network after logging thereof to the persistent storage. By logging the message to persistent storage prior to delivery thereof, a technique is provided which ensures resiliency to the routing of the message to the one or more clients  
25 notwithstanding router or link failure within the network.

In a further aspect, an article of manufacture is provided which includes at least one computer usable medium having computer readable program code means embodied therein for effecting routing of messages within the network. The



computer readable program code means in the article of manufacture includes: computer readable program code means for causing a computer to effect receiving a message; and computer readable program code means for causing a computer  
5 to effect routing the message to one or more clients of the network, the routing being based on data content of the message irrespective of any destination information that may be within the message, and being resilient to router or link failure within the network.

10 In a still further aspect, an article of manufacture is provided which includes at least one computer usable medium having computer readable program code means embodied therein for effecting routing of messages within a routing network. The computer readable program code means in the article of  
15 manufacture includes: computer readable program code means for causing a computer to effect receiving a message; computer readable program code means for causing a computer to effect logging the message to persistent storage within the routing network; and computer readable program code  
20 means for causing a computer to effect delivering the message to one or more clients of the network after the logging thereof, wherein the logging to persistent storage prior to delivery of the message provides resiliency to the routing network notwithstanding router or link failure  
25 within the network.

To restate, provided herein is a technique for logging messages within a routing network itself to ensure reliable multicasting across the network. Although principally described herein in connection with data-content routing of  
30 messages, the logging technique can be applied to other

routing systems, e.g., subject-based routing. The technique is scalable through the provision of multiple loggers within the network. Additionally, multiple loggers can be used to balance the load on the system. A system implementing the logging technique of the present invention allows senders and receivers to connect anywhere in the network regardless of the location of the loggers. Messages are preferably logged only once within a router network. Again, logging of messages occurs within the network itself between the sender and the one or more clients to which the message is directed.

The logging technique described herein allows a sender or receiver to choose the level of reliability (i.e., quality of service) required by either the sender or the clients. This choice allows a tradeoff of system resources versus quality of service. For a sender or receiver requesting "uniform delivery", the routing network either delivers the message to all clients or delivers the message to none of the clients. For a sender or receiver requesting "at most once delivery", the routing network detects and eliminates duplicate messages. "At least once delivery" quality of service is also provided by ensuring that loss of a message within the routing network is identified, and the sender is notified to retransmit the message. For a sender or receiver requesting "exactly once delivery" the routing network neither loses the message without notifying the sender nor makes a duplicate delivery of the message to a client. Again, the particular type of delivery can be selected by the sender or the receiving client.

### Brief Description of the Drawings

The above-described objects, advantages and features of the present invention, as well as others, will be more readily understood from the following detailed description  
5 of certain preferred embodiments of the invention, when considered in conjunction with the accompanying drawings in which:

**Fig. 1** depicts one example of a distributed network incorporating and using the resilient routing capability of  
10 the present invention;

**Fig. 2** depicts one example of a spanning tree used in accordance with the principles of the present invention;

**Fig. 3** depicts one embodiment of a distributed router network configured with the resilient routing capability of  
15 the present invention;

**Fig. 4** depicts one embodiment of a router for use in accordance with the principles of the present invention in a router network such as depicted in **Fig. 3**;

**Fig. 5** depicts one example of a router configured as a  
20 logger with message logging capability in accordance with the principles of the present invention;

**Fig. 6a** depicts one example of a client message buffer used by a router having clients connected thereto in accordance with the principles of the present invention;

**Fig. 6b** depicts one example of a logging acknowledgment (LACK) message sent by a logger to a router in accordance with the principles of the present invention;

**Fig. 7** is a flowchart of one embodiment of a resilient message routing process in accordance with the principles of the present invention;

**Fig. 8** is a flowchart of one embodiment of logging acknowledgment (LACK) processing in accordance with the principles of the present invention;

**Fig. 9** is a flowchart of one example of processing for failure recovery within the routing network in accordance with the principles of the present invention;

**Fig. 10** is a flowchart of an at most once delivery quality of service in accordance with the principles of the present invention; and

**Fig. 11** is a flowchart of an at least once delivery quality of service in accordance with the principles of the present invention.

#### **Best Mode for Carrying Out the Invention**

As noted above, the present invention is in one aspect an extension of the routing capability disclosed in the above-incorporated application wherein messages are routed in a network based on the content of the data within the message. In particular, the message does not need to include destination information, such as destination

addresses or a group destination name. Instead, data within the message is used to traverse a data structure to determine the link or links over which the message is to be forwarded in order to reach the consumers (subscribers or  
5 clients) interested in the message.

In accordance with the principles of the present invention, this content-based routing capability is enhanced for multicasting messages in a manner which is resilient to failures in the network, its routers, or clients. The  
10 invention is referred to herein as comprising a "reliable routing capability" for a routing network such as the above-described content-based routing network. However, those skilled in the art will recognize that the logging technique presented hereinbelow for ensuring message delivery  
15 notwithstanding a failure within the network is equally applicable to other routing systems, such as a subject-based routing system. This reliable routing capability includes support for four "qualities of service": (1) "uniform delivery" under which the routing network either delivers  
20 the message to all receivers or none of the receivers, (2) "at most once delivery" under which the routing network detects and eliminates duplicate messages, (3) "at least once delivery" under which the routing network detects the loss of a message and notifies the sender to retransmit the  
25 message, and (4) "exactly once delivery" under which the routing network neither loses a message without notifying the sender nor makes duplicate deliveries to receivers.

One example of a distributed network 100 incorporating and using the reliable routing capability of the present  
30 invention is depicted in **Fig. 1** and described in detail

below. Network 100 includes, for instance, a plurality of computing units 102 coupled to one another by links 104.

Each link couples two computing units in the network, and each computing unit may have any number of links  
5 connected to it. Each link is bidirectional, i.e., a computing unit may send and receive messages on the link. Each link is also connection oriented, i.e., the computer units at the ends of the link are notified when the link fails. Furthermore, each link propagates messages in a  
10 first-in first-out manner. Each computing unit in the network is either a client computer (represented by the smaller ovals, such as those having addresses 101a, 101b), meaning that it has requested to receive messages whose content satisfies certain properties; or it is a router  
15 computer (represented by the larger ovals, such as 108a, 108b), meaning that it forwards messages received on one network link onto other links on the way to the client computer(s). The clients are collectively referred to herein as clients 101 and the routers are collectively  
20 referred to as routers 108. (For purposes of this discussion, if a single computing unit serves both as a router and as a client, these two separate functions will be considered as two computing units connected by a link.)

Each computing unit can be any type of computing unit  
25 that can be included in a network. For example, it can be an RS/6000 computing node or any other of various types of computing nodes, processors, computers or systems. The network can also include different types of computing units coupled to one another via the links. The links include,

for instance, TCP connections over IP links, as only one example.

Distributed network 100 can be included in various systems that require the passing of messages or data. These systems include, for instance, the internet or a content-based publish/subscribe system.

Content-based publish/subscribe systems improve the degree of decoupling between publishers and subscribers. In content-based publish/subscribe systems, subscriptions are specified in terms of predicates on the posted data, rather than in terms of subject identifiers supplied by the publisher. One example of a content-based publish/subscribe system is described in co-pending U.S. Patent Application Serial No. 08/975,280, entitled "Method And System For Matching Consumers To Events," Astley et al., which is hereby incorporated herein by reference in its entirety. The examples described herein are with reference to a content-based subscription system. However, these are only examples. The present invention can be employed with other types of systems without departing from the spirit of the present invention.

In one embodiment of the invention, each router 108 of network 100 (**Fig. 1**) has associated therewith a spanning tree, which lays out the best path (according to some criterion, such as latency) from the router to each client 101. In this embodiment, it is assumed that routers agree on a common criterion for measuring distance between nodes in the network. There may in fact be multiple spanning trees. For example, alternative spanning trees may specify

either backup routes, or peak load routes. Herein, it is assumed that one spanning tree is in effect for the routing of any particular message.

One example of a spanning tree, which is associated with router 108a (**Fig. 1**), is depicted in **Fig. 2**. As shown in **Fig. 2**, there is a path from router 102a to every other node in the spanning tree. A message to be routed from router 102a to one or more of the other nodes is routed via one or more of the links associated with router 102a, i.e., links 1-3. For example, if a message is to be routed from node 102a to node 101c, then link 2 is used. As a further example, if a message is to be forwarded toward client 101a, then link 3 is used.

One embodiment for building a spanning tree from a network topology, that is an arbitrary graph, is described in detail in Introduction to Algorithms, by Cormen, Leiserson, Rivert, Chapter 24, pp 498-513, Published by MIT Press (1990), which is hereby incorporated herein by reference in its entirety.

In addition to the spanning tree associated with each router, each router has a routing table. The routing table includes an entry for each client computer in the network. Each entry of the routing table associates a client address with the identifier of the network link constituting the next segment on the path in the spanning tree from the router to the client. For a router with  $d$  network links, each such link identifier is an integer between 1 and  $d$ . For instance, the client having address 101a has a corresponding link identifier of 3 (see **Fig. 2**).



Each routing table is constructed via information from the network topology (e.g., the client addresses) and hence from the corresponding spanning tree (e.g., the link identifiers), in a known manner.

5 By way of example, **Fig. 3** depicts one embodiment of a publish/subscribe system, generally denoted 300, to employ resilient message routing in accordance with the principles of the present invention. System 300 includes a network of routers 302 connected via links 303 in an arbitrary graph  
10 topology. A number of clients connected to the periphery of this router network either publish messages or subscribe to messages. Those clients publishing messages comprise publishers 304, while those clients subscribing to messages comprise subscribers 306. The router network is responsible  
15 for routing messages from a publisher 304 to interested subscribers 306 based on matching messages to subscription predicates.

This protocol, known as content-based routing, is described in detail in the initially-incorporated co-pending  
20 patent application entitled "Routing Messages Within A Network Using The Data Content Of The Message." Briefly explained, from each router node at which a publisher is present, the system computes and stores a spanning tree to reach every other node in the network. All published  
25 messages from the publisher follow the paths in that spanning tree, with each router node performing enough matching to determine which of its child routers should receive the message.

The present invention achieves reliability of routed messages by saving messages to persistent storage within the router network and retrieving and redelivering the message whenever there is a failure in the network. Publishers and subscribers that need reliability of messages may specify a quality of service parameter, e.g., "uniform delivery". Uniform delivery is provided for ensuring delivery of a message to all active subscribers notwithstanding failure in the network, e.g., the routers, or the links. Special routers in the router network 300 are designated logging nodes or loggers 310 and support the ability to log messages to stable storage. When there is at least one subscriber needing logging, the routing algorithm ensures that messages are routed to a logger. When reliable delivery is required by at least one publisher or subscriber, the routing protocol incorporates message logging in accordance with the principles of the present invention.

Briefly explained, messages originally sent by a publisher are assigned unique ids by the first router node receiving the message. All routers (including logging nodes) receiving a published message thereafter note the message's unique message id and the source node (i.e., publisher). Routing information comprising the nodes to which the message will be routed is then computed based on message content and stored, e.g., indexed by using the message id. Routing computation always includes the nearest logging node. Messages are then forwarded to applicable neighboring routers and delivered to any subscribing clients to that node not requiring reliable delivery. Messages to the node's subscribing clients requiring reliable delivery are not delivered, but instead buffered in a client message

buffer (see **Fig. 6a**) for later delivery as explained further below.

**Fig. 4** depicts one embodiment of a router node for use in accordance with the principles of the present invention.

5 When a message arrives at router 400 it is stored into a message table 402 using the unique message identifier. Information stored includes the source node identification as well as the neighboring nodes to which the message is to be forwarded. These neighboring nodes are calculated by a  
10 content routing computation component 404 after the message has been received. Computation component 404 takes the message and based upon stored subscriptions returns a set of destinations or links upon which the message should be forwarded. Again, in one embodiment, this computation is  
15 content dependent and can be accomplished as described in the above-incorporated co-pending application. However, this component can be implemented in other ways, e.g., subject-based routing. In accordance with the principles of the present invention, router 400 also includes a reliable  
20 routing component 406 and logging acknowledge (LACK) received table 408 and LACK send table 409, which are described further below.

As noted, pursuant to this invention one or more selected routers in the network also serve as logging nodes.

25 **Fig. 5** depicts one embodiment of a logging node or logger which comprises a router 450 and persistent or stable storage 460, such as a file system or a database. When a published message is received at any logger node, the logger node performs the following logging functions in addition to  
30 the standard routing functions described above.

1. The message is assigned a next logging number in sequence.
2. The message is written to disk 460 using its logging number.
- 5 3. A logging acknowledgment (LACK) is sent to those routers to which the message was routed, as well as back towards the source node of the message. A LACK message (**Fig. 6b**) includes the message id, the logger id, and the logging number.

10       When a LACK message is received by a router, it looks up the routing information for the original message, sends the LACK message down the links the original message was sent excluding the link from which the LACK message was received. In addition, the router forwards the LACK towards  
15 the source of the original message, and deletes the routing information stored in the message table for that message. If the message table was lost due to the router failing and recovering, the LACK message is forwarded along all links on the spanning tree with the logger at the root, excluding the  
20 link from which the LACK message was received. Also, if the original message corresponding to the LACK was buffered waiting to be delivered to one or more subscribing clients requiring uniform delivery, the message will now be delivered.

25       In support of automatic recovery from failure, each router node also stores (pursuant to the present invention) the following information while processing LACK messages.

- For each logger node from which a LACK has been received, the latest logging number that has been received for that logger.
- For each link on which a LACK has been forwarded, the latest logging number that has been sent.

5

This information is stored into the LACK tables 408, 409 (**Fig. 4**) for the router. Since pursuant to this invention FIFO links are assumed between a logger and any given router, receiving (or sending) a LACK for a logging number N implies that all relevant LACKs for logging numbers less than N have also been received (or sent). Note that non-first-in first-out (non-FIFO) links are made FIFO for the present invention, for example, using standard techniques such as the TCP protocol.

15 As implied in the above description, three processing phases are implemented in one embodiment in accordance with the principles of the present invention. In a first phase, messages are routed from a publisher to all nodes in the network, but not necessarily delivered to all subscribers, depending upon whether uniform delivery has been specified by the publisher or the subscribers. In a second phase, messages are delivered from the routing nodes based upon an acknowledgment received from the logger node (i.e., the LACK message). This phase two processing and use of the loggers ensures uniform delivery of messages requiring reliable routing. A third phase is entered whenever a node or link fails within the network. This phase involves a request for and a replaying of messages that were lost due to the failure.

**Fig. 7** depicts one embodiment of phase one message routing processing in accordance with the present invention. This processing is implemented at each node of the network. At a given node, a published message is received 700 and  
5 recorded into the node's message table 402 (**Fig. 4**) using the message id and source node information provided with the message 710. The node's content routing computation 404 (**Fig. 4**) next determines neighboring node routing information which is also stored into the message table 720.  
10 Again, this computation is based on data content of the message when employing a routing system such as described in the initially-incorporated patent application.

The message is next forwarded to applicable neighboring nodes 730 as determined by the content routing computation, and delivered to subscribing clients not requiring uniform  
15 delivery 740. The subscribing clients comprise clients coupled to the particular router node processing the published message. For example, certain subscriber clients to a particular router node may require uniform delivery, while others may not. Thus, the process allows those  
20 clients not requiring uniform delivery to immediately receive the published message. Again, as used herein, "uniform delivery" comprises a system guarantee that subscribers who have requested uniform delivery receive the  
25 message only if all other subscribers requesting uniform delivery also receive the message. Otherwise, the message is not forwarded to any subscriber requesting the uniform delivery. Either every subscriber receives the published message or no subscriber of uniform delivery receives the  
30 published message.

In order to deliver messages to clients requesting uniform delivery, the router node proceeds to buffer the message for later delivery to those clients 750. If the router node is a logger 760, the message is assigned a logging number and written to disk 770. A logging acknowledgment (LACK) is then sent to the applicable neighboring router nodes (computed in step 720), as well as back to the source node providing the message now held in the message table 780. This completes 790 this embodiment of the message routing phase.

**Fig. 8** depicts an approach for processing LACK messages in accordance with the principles of the present invention. Each router node in the network implements this processing upon receipt of a LACK message 800. First, the routing information for the original message is determined from the node's message table 810. The LACK message is then sent to those nodes where the original message was sent minus the neighboring node from which the LACK message was received and plus the original message's source node 820. The routing information corresponding to this message id is deleted from the node's message table 830, and, if the message was buffered in the client message buffer table (such as depicted in **Fig. 6a**) for delivery to one or more clients, then the message is now delivered.

Essentially, the process comprises determining whether there is a message id in the uniform delivery table corresponding to the id of the LACK message being processed. If so, then the message is retrieved from the uniform delivery table and delivered to the one or more clients of the node requesting uniform delivery. Thus, uniform

delivery means that the message is buffered in the client message buffer of the node and then delivered once the logging acknowledgment signal is received back from a logging node of the network.

5           In a third phase, a routing system in accordance with the principles of the present invention enters a failure recovery process whenever a router detects failure of, for example, its parent node, or the link to its parent node. The detecting child router notifies a configuration manager,  
10       which we assume tracks the configuration of the router network. The configuration manager replies with a replacement parent node. This new parent has the same parent and children as the failed node. Implementation of this monitoring for node failure and replacement of a parent  
15       node are within the capabilities of one of ordinary skill in the art.

          Note that a configuration manager is a "network system service" that is responsible for maintaining information about the structure, function, and status of a network  
20       system. This includes information such as the network topology, nodes with certain properties (such as loggers), quality of service offered nodes in the network, etc. A system's configuration may be statically fixed or dynamically changing. A configuration manager may be  
25       centralized or distributed. Network system management products such as IBM's Tivoli TME-10 contain configuration management components. From the perspective of the current invention, the system uses the topology information in the configuration manager when nodes or links fail and  
30       substitutes nodes to re-establish these failed components.



Referring to **Fig. 9**, in one embodiment, the failure recovery phase of the present invention begins with detection of failure of the parent node, or a link to the parent node 900. The configuration manager or system  
5 replaces the failed node 910, and child nodes of the failed node notify the new parent of the latest logging numbers received from each logger of the system 920. The new parent collects these responses into a sequence and forwards a request for retransmission (RTREQ) for this range of  
10 messages to its parent node 930. Upon receiving an RTREQ message, each router narrows the set of requested messages based on its logging sequence vector for the child link from which the RTREQ was received, after which the RTREQ message is forwarded on to the next node 940.

15 Upon receiving an RTREQ message at a logger node, the logger node narrows the set of requested messages and forwards the message onto the rest of the tree, while also finding all messages in the narrowed set of messages that it has logged and retransmits them to the new parent 950. When  
20 the new parent receives re-transmitted messages it requested from a logging router, it matches the messages that fall in the persistence range and delivers them to the appropriate children nodes 960. After all such messages have been delivered, the new parent node begins to forward new  
25 messages to its children, thereby preserving the FIFO property of the protocol.

Optionally, each router node may cache a set of recently sent messages. When used, the cache may reduce the number of messages requested in an RTREQ message or may  
30 eliminate the need for an RTREQ message.

To summarize, using the above protocol a message is guaranteed to be received by all subscribers requiring the "uniform delivery" quality of service, or none at all will receive the message. However, if a publisher crashes and recovers and as a result republishes a message, the message may be delivered multiple times to subscribers. The present invention avoids this problem using the following augmentation to the uniform delivery protocol. The augmentation is referred to as "at most once delivery" of messages, and one embodiment of the process is depicted in **Fig. 10.**

Clients desiring duplicate detection include a client-specific unique identifier with each message before forwarding the message up towards the logger node as in the original protocol 1000. Upon receipt of a data message, the logging engine checks to see if the node has previously seen the client-specific unique identifier 1010. If it has, the node logs the fact that it will abort this message, and transmits a logging abort (LABORT) message through the tree instead of a LACK message 1020. Each LABORT message still has a logging sequence number so that, in case of failures, routing nodes will receive possibly lost LABORT messages and, therefore, eventually remove routing information saved for the duplicate message. Upon receipt of a LABORT message at a node, the routing information for the original message is determined from the node's message table 1030. The LABORT message is then sent to those nodes where the original message was sent minus the neighboring node from which the LABORT message was received plus the original message's source node 1040. The routing information corresponding to this message id is deleted from the node's

message table 1050, and, if the message was buffered in the client message buffer table for delivery to one or more clients, then the message is deleted 1060.

Using the above protocol, a message is guaranteed to be  
5 received by all subscribers requiring the "uniform delivery" quality of service if the message reaches a logger node. It may also happen that a message is lost before it reaches a logger, due to failure of a router or link in route to a logger. In this case, the message is not at all delivered  
10 to uniform delivery subscribers. It is also desirable for publishers to become aware of the fact that a message has not reached a logger node, and if so, republish the message, thereby guaranteeing the delivery of the message "at least once" to every subscriber. The present invention handles  
15 this as depicted in **Fig. 11**.

Basically, a publisher can detect whether a message has been delivered to "uniform delivery" subscribers by subscribing to its own messages under the "uniform delivery" quality of service 1100. If the publisher receives the  
20 message, then it has been delivered to the uniform subscribers 1110. However, if the publisher does not receive the message within a certain time out period, it can query a logger node whether the published message has been logged 1120. If the reply to this query is received by the  
25 publisher before the original published message, it can be inferred, due to the FIFO property of links, that the original published message has been lost before it reached the logger node 1130. In this case, the message can be republished 1140.

As a further variation, "exactly once" delivery of messages can be ensured by using in combination the protocols for at most once delivery and at least once delivery of messages. A message is delivered exactly once to each subscriber in the face of: (1) publisher failures and recoveries; (2) node and link failures before a message gets to a logger; and (3) node and link failures after a message gets to a logger and before delivery to subscribers. These are respectively accomplished as follows: (1) a publisher includes a unique id in a message with the help of which the system detects duplicate publications of a message and removes the duplicate, as described above; (2) the publisher makes sure that a message reaches a logger by subscribing to its own messages as well as by querying the logger for lost messages, as described above; and (3) detecting node and link failures, re-establishing these nodes and links, and replaying lost messages from one or more loggers, as described above.

To summarize, those skilled in the art will note from the above description that in a publish/subscribe system supporting content-based subscription, a method to route messages based on content has been provided in a manner that is resilient to router or link failure. The publish/subscribe system may be realized as a router network connected in an arbitrary graph topology, except that the links from a logger node to any router are assumed to be FIFO. Further, a method to deliver a message to either all subscribers requesting a "uniform delivery" quality of service, or to none of them, is described above. Variations on this "uniform delivery" quality of service outlined above include an "at most once" quality of service, an "at least

once" quality of service, and an "exactly once" quality of service.


5 The present invention can be included, for example, in an article of manufacture (e.g., one or more computer program products) having, for instance, computer usable media. This media has embodied therein, for instance, computer readable program code means for providing and facilitating the capabilities of the present invention. The articles of manufacture can be included as part of the  
10 computer system or sold separately.

Additionally, at least one program storage device readable by machine, tangibly embodying at least one program of instructions executable by the machine, to perform the capabilities of the present invention, can be provided.

15 The flow diagrams depicted herein are provided by way of example. There may be variations to these diagrams or the steps (or operations) described herein without departing from the spirit of the invention. For instance, in certain cases, the steps may be performed in differing order, or  
20 steps may be added, deleted or modified. All of these variations are considered to comprise part of the present invention as recited in the appended claims.

While the invention has been described in detail herein in accordance with certain preferred embodiments thereof,  
25 many modifications and changes therein may be effected by those skilled in the art. Accordingly, it is intended by the appended claims to cover all such modifications and

changes as fall within the true spirit and scope of the invention.

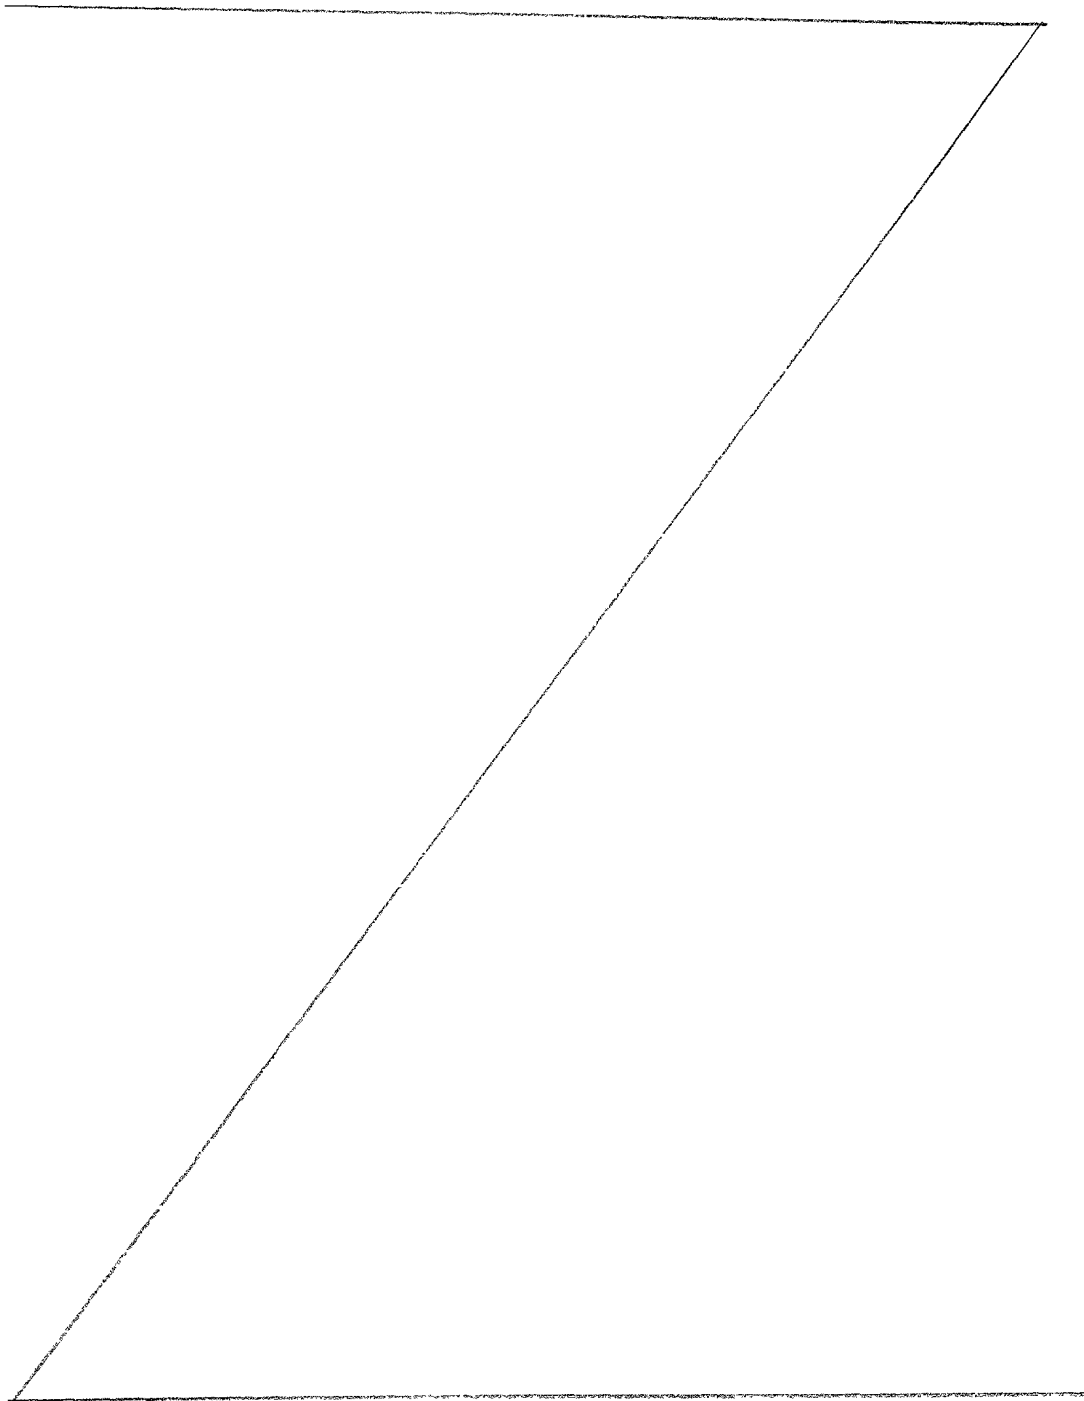

CONFIDENTIAL

## Claims

1           1.    A method for routing messages within a network,  
2    said method comprising:

3                    receiving a message; and

4                    routing said message to one or more clients of  
5    said network, said routing being based on data content  
6    of said message irrespective of any destination  
7    information that may be within said message, and being  
8    resilient to router or link failure within said  
9    network.

1           2.    The method of claim 1, wherein said network  
2    comprises a publish/subscribe system supporting content-  
3    based subscription, said one or more clients comprise  
4    subscribers, and wherein said routing comprises delivering  
5    said message to all subscribers requesting a uniform  
6    delivery quality of service or if unable to deliver said  
7    message to all of said subscribers requesting uniform  
8    delivery, delivering said message to none of said  
9    subscribers requesting uniform delivery.

1           3.    The method of claim 2, wherein said delivering  
2    said message to all subscribers requesting uniform delivery  
3    comprises delivering said message to all subscribers  
4    requesting uniform delivery notwithstanding failure at one  
5    or more routers or links of said network, said delivering  
6    comprising storing said message to persistent storage at a  
7    logging node of said network prior to providing said message  
8    to said subscribers requesting uniform delivery.

1           4.    The method of claim 1, wherein said routing  
2 comprises logging said message at at least one logging node  
3 within said network before delivering said message to said  
4 one or more clients of said network, said logging comprising  
5 storing said message in persistent storage.

1           5.    The method of claim 4, further comprising  
2 subsequent to said logging of said message, sending a  
3 logging acknowledgment to at least one router of said  
4 network routing said message, and upon receipt of said  
5 logging acknowledgment at said at least one router,  
6 delivering said message to a client thereof, said client  
7 requiring uniform delivery and comprising one client of said  
8 one or more clients.

1           6.    The method of claim 5, further comprising  
2 buffering said message at said at least one router of said  
3 network routing said message, said buffering occurring prior  
4 to said storing of said message at said persistent storage  
5 and when passing said message through said at least one  
6 router to said at least one logging node.

1           7.    The method of claim 5, wherein said network  
2 comprises a plurality of routers coupled together, one of  
3 said routers comprising said logging node having said  
4 persistent storage associated therewith, said logging  
5 comprising employing said logging node having said  
6 persistent storage associated therewith to store said  
7 message and to thereafter send said logging acknowledgment  
8 back to each router of said network responsible for routing  
9 said message.



1           8.    The method of claim 1, wherein said network  
2 comprises a spanning tree and wherein said method further  
3 comprises providing a logging node within said spanning tree  
4 for logging said message to persistent storage during  
5 routing of said message to said one or more clients of said  
6 network.

1           9.    The method of claim 8, wherein said routing  
2 comprises employing said logging of said message to  
3 persistent storage to ensure a uniform delivery quality of  
4 service of said message to said one or more clients of said  
5 network notwithstanding failure of one or more routers or  
6 links within said network.

1           10.   The method of claim 1, wherein said network  
2 comprises a spanning tree having a plurality of routers,  
3 said method further comprising detecting failure of a router  
4 within said tree before completing routing of said message  
5 to said one or more clients of said network, reconfiguring  
6 said tree to replace said failed router with a new router,  
7 and automatically generating a request for retransmission of  
8 said message.

1           11.   The method of claim 10, further comprising prior  
2 to said detecting of said failure, logging said message  
3 within persistent storage of said network and issuing a  
4 logging acknowledgment confirming storage of said message to  
5 at least one router of said tree through which said message  
6 is routed to said one or more clients.

1           12. The method of claim 10, wherein said automatically  
2 generating said request for retransmission of said message  
3 occurs if said new router detects from one or more of its  
4 child routers a logging number associated with said message,  
5 said logging number having been received in said logging  
6 acknowledgment confirming storage of said message.

1           13. The method of claim 1, wherein said routing  
2 further comprises determining within said network whether  
3 said message comprises a duplicate message to said one or  
4 more clients of said network, and if so, aborting said  
5 duplicate message such that said message is delivered to  
6 said one or more clients at most once.

1           14. The method of claim 1, further comprising  
2 automatically informing a sender of said message when the  
3 message has been lost within the network to allow the sender  
4 to retransmit said message for routing to said one or more  
5 clients of said network so that said message is delivered at  
6 least once to said one or more clients.

Accepted for filing

1           15. The method of claim 1, wherein said routing  
2 comprises logging said message at at least one logging node  
3 within said network before delivering said message to said  
4 one or more clients of said network, said logging comprising  
5 storing said message into persistent storage, and wherein  
6 said method further comprises subsequent to said logging of  
7 said message, sending a logging acknowledgment to at least  
8 one router of said network routing said message, and upon  
9 receipt of said logging acknowledgment at said at least one  
10 router of said network routing said message, looking up  
11 routing information for said message from a message table  
12 maintained at said at least one router, then sending said  
13 logging acknowledgment across said network using said looked  
14 up routing information, and thereafter deleting said routing  
15 information from said message table.

1           16. A method for routing messages within a routing  
2 network, said method comprising:

3           receiving a message;

4           logging the message to persistent storage within  
5 the routing network; and

6           after said logging, delivering said message to one  
7 or more clients of said network, wherein said logging  
8 to persistent storage prior to delivery of said message  
9 to said one or more clients of said network provides  
10 resiliency to said routing notwithstanding router or  
11 link failure within said network.

1           17. The method of claim 16, wherein said logging  
2 comprises storing said message in said persistent storage at  
3 a logging node within said routing network before said  
4 delivery of said message to said one or more clients of said  
5 network.

1           18. The method of claim 17, further comprising sending  
2 a logging acknowledgment to at least one router of said  
3 network routing said message after said logging of said  
4 message to said persistent storage, and upon receipt of said  
5 logging acknowledgment at said at least one router of said  
6 network routing said message, delivering said message to a  
7 client thereof, said client thereof requiring uniform  
8 delivery and comprising one client of said one or more  
9 clients.

1        19. The method of claim 16, wherein said network  
2 comprises a spanning tree and wherein said method further  
3 comprises providing a logging node within said spanning tree  
4 for said logging of said message to persistent storage  
5 during routing of said message to said one or more clients  
6 of said network.

1        20. The method of claim 19, wherein said routing  
2 comprises employing said logging of said message to  
3 persistent storage to ensure a uniform delivery quality of  
4 service of said message to said one or more clients of said  
5 network notwithstanding failure of one or more routers or  
6 links within said network.

1        21. The method of claim 16, wherein said routing  
2 network comprises a spanning tree having a plurality of  
3 routers, said method further comprising detecting failure of  
4 a router within said tree before completing routing of said  
5 message to said one or more clients of said network,  
6 thereafter reconfiguring said tree to replace said failed  
7 router with a new router, and automatically generating a  
8 request for retransmission of said message from said  
9 persistent storage.

1        22. The method of claim 16, further comprising  
2 determining within said routing network whether said message  
3 comprises a duplicate message to said one or more clients of  
4 said network, and if so, aborting said duplicate message  
5 such that said message is delivered to said one or more  
6 clients at most once.

1           23. The method of claim 16, further comprising  
2 automatically informing a sender of said message when said  
3 message has been lost within the routing network to allow  
4 the sender to retransmit the message for routing to said one  
5 or more clients of said network so that said message is  
6 delivered at least once to said one or more clients.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225

1           24. A system of routing messages within a network,  
2       said system comprising:

3                       means for receiving a message; and

4                       means for routing said message to one or more  
5       clients of said network, said routing being based on  
6       data content of said message irrespective of any  
7       destination information that may be within said  
8       message, and wherein said means for routing is  
9       resilient to router or link failure within said  
10      network.

1           25. The system of claim 24, wherein said network  
2       comprises a publish/subscribe system supporting content-  
3       based subscription, and wherein said one or more clients  
4       comprise subscribers, with said message being received from  
5       a publisher.

1           26. The system of claim 25, wherein said means for  
2       routing comprises means for delivering said message to all  
3       subscribers requesting a uniform delivery quality of service  
4       or if unable to deliver said message to all of said  
5       subscribers requesting uniform delivery, for delivering said  
6       message to none of said subscribers requesting uniform  
7       delivery.

1           27. The system of claim 26, wherein said means for  
2       routing delivers said message to said subscribers requesting  
3       uniform deliver notwithstanding failure at one or more  
4       routers or links of said network, and wherein said system  
5       further comprises means for logging said message to  
6       persistent storage prior to delivery thereof to said  
7       subscribers requesting uniform delivery.

1           28. The system of claim 24, wherein said means for  
2 routing comprises means for logging said message to at least  
3 one logging node within said network before delivering said  
4 message to said one or more clients of said network, said  
5 means for logging comprising means for storing said message  
6 in persistent storage.

1           29. The system of claim 28, further comprising means  
2 for sending a logging acknowledgment to at least one router  
3 of said network routing said message after said means for  
4 logging stores said message in persistent storage, and  
5 wherein said system further comprises, at said at least one  
6 router of said network routing said message, means for  
7 delivering said message to a client thereof upon receipt of  
8 said logging acknowledgment, said client requiring uniform  
9 delivery and comprising one client of said one or more  
10 clients.

1           30. The system of claim 29, further comprising means  
2 for buffering said message at said at least one router of  
3 said network routing said message, said buffering occurring  
4 prior to said storing of said message at said persistent  
5 storage by said means for logging.

1           31. The system of claim 29, wherein said network  
2 comprises a plurality of routers coupled together, one of  
3 said routers comprising said logging node having said  
4 persistent storage associated therewith, and wherein said  
5 means for logging comprises means for employing said logging  
6 node having said persistent storage associated therewith to  
7 store said message and to thereafter send said logging  
8 acknowledgment back to each router of said network  
9 responsible for routing said message.



1           32. The system of claim 24, wherein said network  
2 comprises a spanning tree and wherein said system further  
3 comprises a logger node within said spanning tree for  
4 logging said message to persistent storage during routing of  
5 said message to said one or more clients of said network.

1           33. The system of claim 24, wherein said means for  
2 routing comprises means for employing said logger node to  
3 log said message to persistent storage to ensure a uniform  
4 delivery quality of service of said message to said one or  
5 more clients of said network notwithstanding failure of one  
6 or more routers or links within said network.

1           34. The system of claim 24, wherein said network  
2 comprises a spanning tree having a plurality of routers, and  
3 further comprising means for detecting failure of a router  
4 within said tree before completing routing of said message  
5 to said one or more clients of said network, and means for  
6 reconfiguring said tree to replace said failed router with a  
7 new router, and means for automatically generating a request  
8 for retransmission of said message.

1           35. The system of claim 34, further comprising means  
2 for logging said message within persistent storage of said  
3 network and for issuing a logging acknowledgment confirming  
4 storage of said message to at least one router of said tree  
5 through which said message is routed to said one or more  
6 clients.

1           36. The system of claim 35, wherein said means for  
2 automatically generating a request for retransmission of  
3 said message comprises means for detecting a logging number  
4 associated with said message stored at one or more child  
5 routers of said new router.

1           37. The system of claim 24, wherein said means for  
2 routing further comprises means for determining within said  
3 network whether said message comprises a duplicate message  
4 to said one or more clients of said network, and if so, for  
5 aborting said duplicate message such that said message is  
6 delivered to said one or more clients at most once.

1           38. The system of claim 24, further comprising means  
2 for automatically informing a sender of said message when  
3 said message has been lost within said network to allow the  
4 sender to retransmit said message for routing to said one or  
5 more clients of said network so that said message is  
6 delivered at least once to said one or more clients.

1           39. A system of routing messages within a routing  
2 network, said system comprising:

3                   means for receiving a message;

4                   means for logging the message to persistent  
5 storage within the routing network; and

6                   means for delivering said message to one or more  
7 clients of said network after said logging of said  
8 message to persistent storage, wherein said logging to  
9 persistent storage prior to delivery of said message to  
10 said one or more clients of said network provides  
11 resiliency to said routing notwithstanding router or  
12 link failure within said network.

1           40. The system of claim 39, wherein said means for  
2 logging comprises means for storing said message in said  
3 persistent storage at a logging node within said routing  
4 network before said delivery of said message to said one or  
5 more clients of said network.

1           41. The system of claim 40, further comprising means  
2 for sending a logging acknowledgment to at least one router  
3 of said network routing said message after said logging of  
4 said message to said persistent storage, and means for  
5 thereafter delivering said message to a client of said at  
6 least one router of said network routing said message, said  
7 client requiring uniform delivery and comprising one client  
8 of said one or more clients.

1        42. The system of claim 39, wherein said routing  
2 network comprises a spanning tree, and said means for  
3 logging comprises a logging node within said spanning tree  
4 for logging said message to persistent storage during  
5 routing of said message to said one or more clients of said  
6 network.

1        43. The system of claim 42, wherein said means for  
2 routing comprises means for employing said logging of said  
3 message to persistent storage to ensure a uniform delivery  
4 quality of service of said message to said one or more  
5 clients of said network notwithstanding failure of one or  
6 more routers or links within said network.

1        44. The system of claim 39, wherein said routing  
2 network comprises a spanning tree having a plurality of  
3 routers, and wherein said system further comprises means for  
4 detecting failure of a router within said tree before  
5 completing routing of said message to said one or more  
6 clients of said network, and for thereafter configuring said  
7 tree to replace said failed router with a new router, and  
8 for automatically generating a request for retransmission of  
9 said message from said persistent storage.

1        45. The system of claim 39, further comprising means  
2 for determining within said routing network whether said  
3 message comprises a duplicate message to said one or more  
4 clients of said network, and if so, for aborting said  
5 duplicate message such that said message is delivered to  
6 said one or more clients at most once.

1           46. The system of claim 39, further comprising means  
2 for automatically informing a sender of said message when  
3 said message has been lost within said routing network to  
4 allow the sender to retransmit the message for routing to  
5 said one or more clients of said network so that said  
6 message is delivered at least once to said one or more  
7 clients.

46. The system of claim 39, further comprising means  
for automatically informing a sender of said message when  
said message has been lost within said routing network to  
allow the sender to retransmit the message for routing to  
said one or more clients of said network so that said  
message is delivered at least once to said one or more  
clients.



1       48. A system for routing messages comprising:  
2           a network adapted to receive a message;  
3           a logger node within said network for logging said  
4       message to persistent storage; and  
5           said network comprising one or more routers for  
6       delivering said message to one or more clients of said  
7       network, wherein said logging of said message to  
8       persistent storage occurs prior to delivery of said  
9       message to said one or more clients of said network,  
10      thereby providing resiliency to said routing  
11      notwithstanding router or link failure within said  
12      network.

Accepted for publication

1           49. An article of manufacture, comprising:

2                   at least one computer usable medium having  
3           computer readable program code means embodied therein  
4           for effecting routing of messages within a network, the  
5           computer readable program code means in the article of  
6           manufacture comprising:

7                           computer readable program code means for  
8           causing a computer to effect receiving a message;  
9           and

10                           computer readable program code means for  
11           causing a computer to effect routing said message  
12           to one or more clients of said network, said  
13           routing being based on data content of said  
14           message and being resilient to router or link  
15           failure within said network.



1           50. An article of manufacture, comprising:

2                   at least one computer usable medium having  
3 computer readable program code means embodied therein  
4 for effecting routing of messages within a routing  
5 network, the computer readable program code means in  
6 the article of manufacture comprising:

7                   computer readable program code means for  
8 causing a computer to effect receiving a message;

9                   computer readable program code means for  
10 causing a computer to effect logging said message  
11 to persistent storage within the routing network;  
12 and


13                   computer readable program code means for  
14 causing a computer to effect delivering said  
15 message to one or more clients of said network  
16 after said logging thereof, wherein said logging  
17 to persistent storage prior to delivery of said  
18 message to one or more clients of said network  
19 provides resiliency to said routing  
20 notwithstanding router or link failure within said  
21 network.

\* \* \* \* \*

**MESSAGE LOGGING FOR RELIABLE MULTICASTING  
ACROSS A ROUTING NETWORK**

**Abstract of the Disclosure**

5       A technique for reliably multicasting a message within  
a router network is provided. At least one special router  
in the network has associated persistent storage for logging  
a message being routed to one or more clients. When a  
message is received at this logger node, the logger places  
the message in persistent storage and sends a logging  
10       acknowledgment back to those routers to which the message  
was originally routed, as well as back towards the source of  
the message. The logger acknowledgment includes the message  
id, the logger id, and a logging number. When the logger  
acknowledgment is received by a router, it looks up the  
15       routing information from the original message, and sends the  
acknowledgment to those neighboring routers to which the  
original message was sent, excluding the link from which the  
logger acknowledgment was received. If the original message  
corresponding to the logger acknowledgment was buffered at  
20       this router waiting to be delivered, the message is then  
delivered to its client nodes. Processes for recovering  
from node or link failure within the router network, and for  
at most once delivery of messages, at least once delivery of  
messages, and exactly once delivery of messages are also  
25       provided.





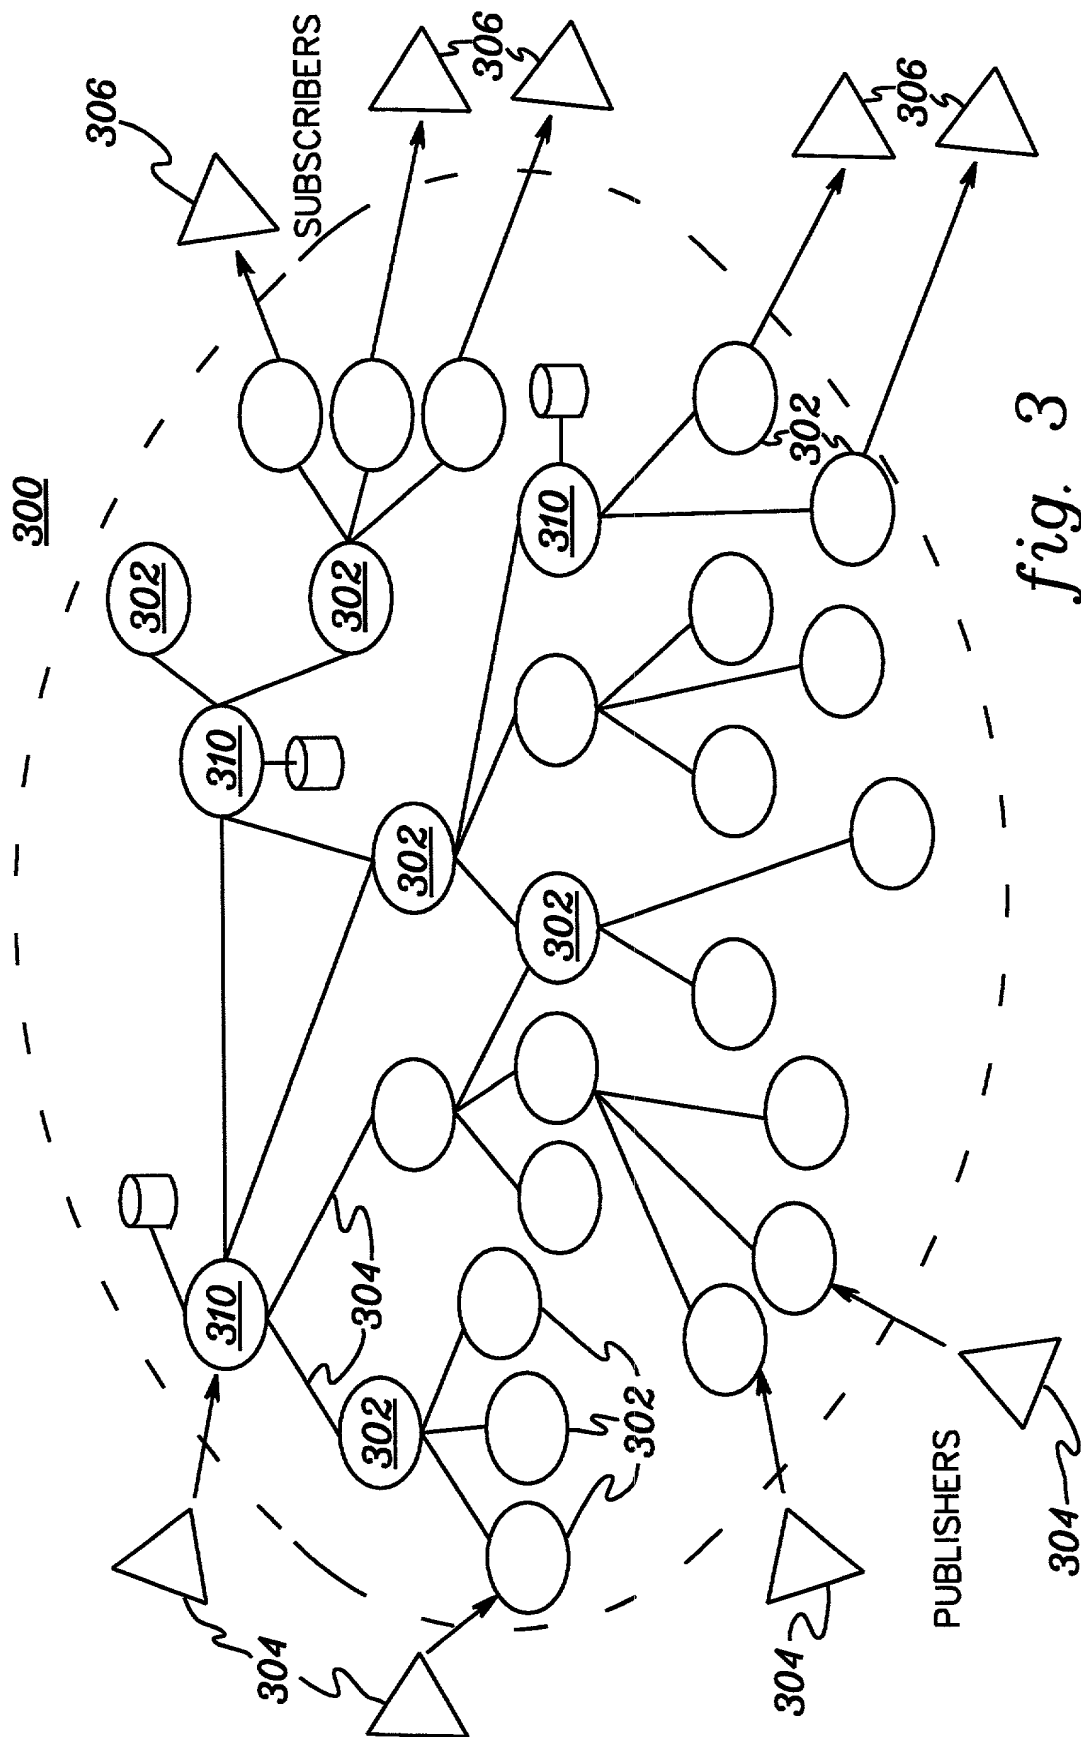


fig. 3


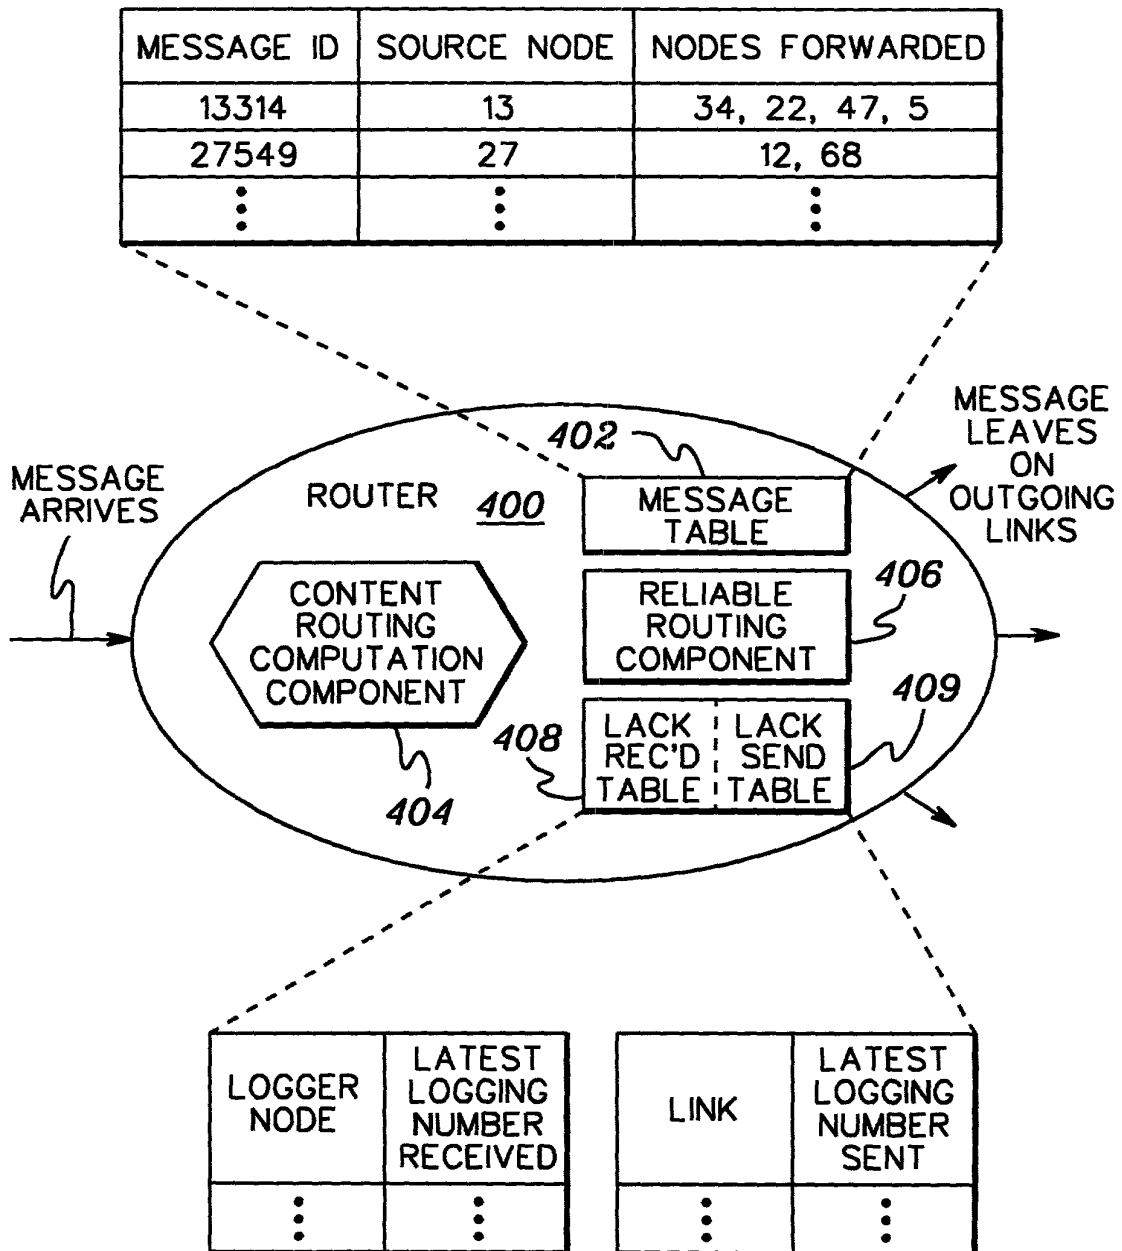


fig. 4

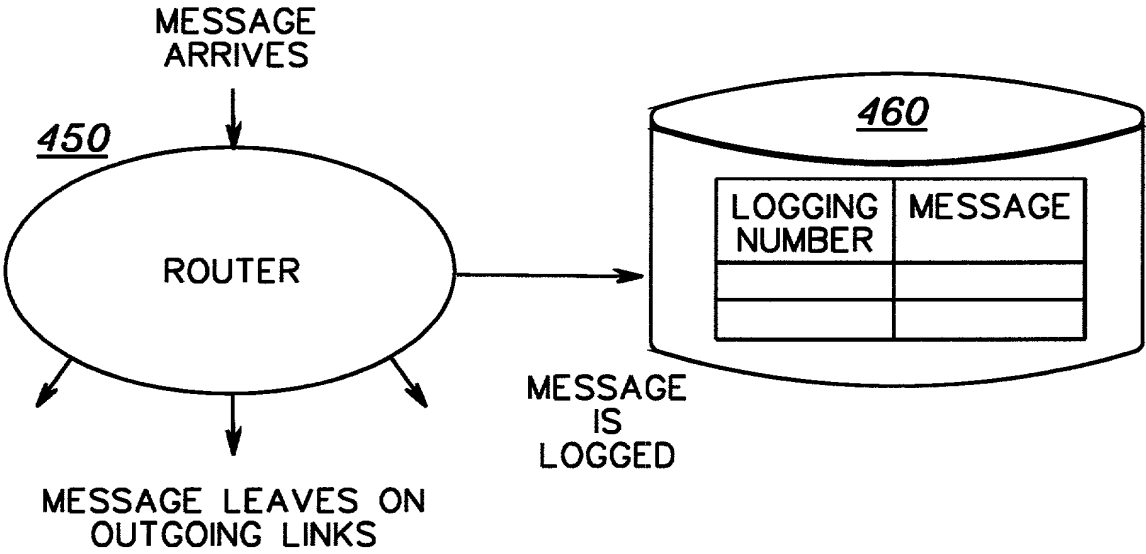


*fig. 5*

MESSAGE ID	MESSAGE	CLIENTS
13524	—	203, 458
3238	—	300
⋮	—	⋮


*fig. 6A*

MESSAGE ID	LOGGER ID	LOGGING NO.
------------	-----------	-------------


*fig. 6B*

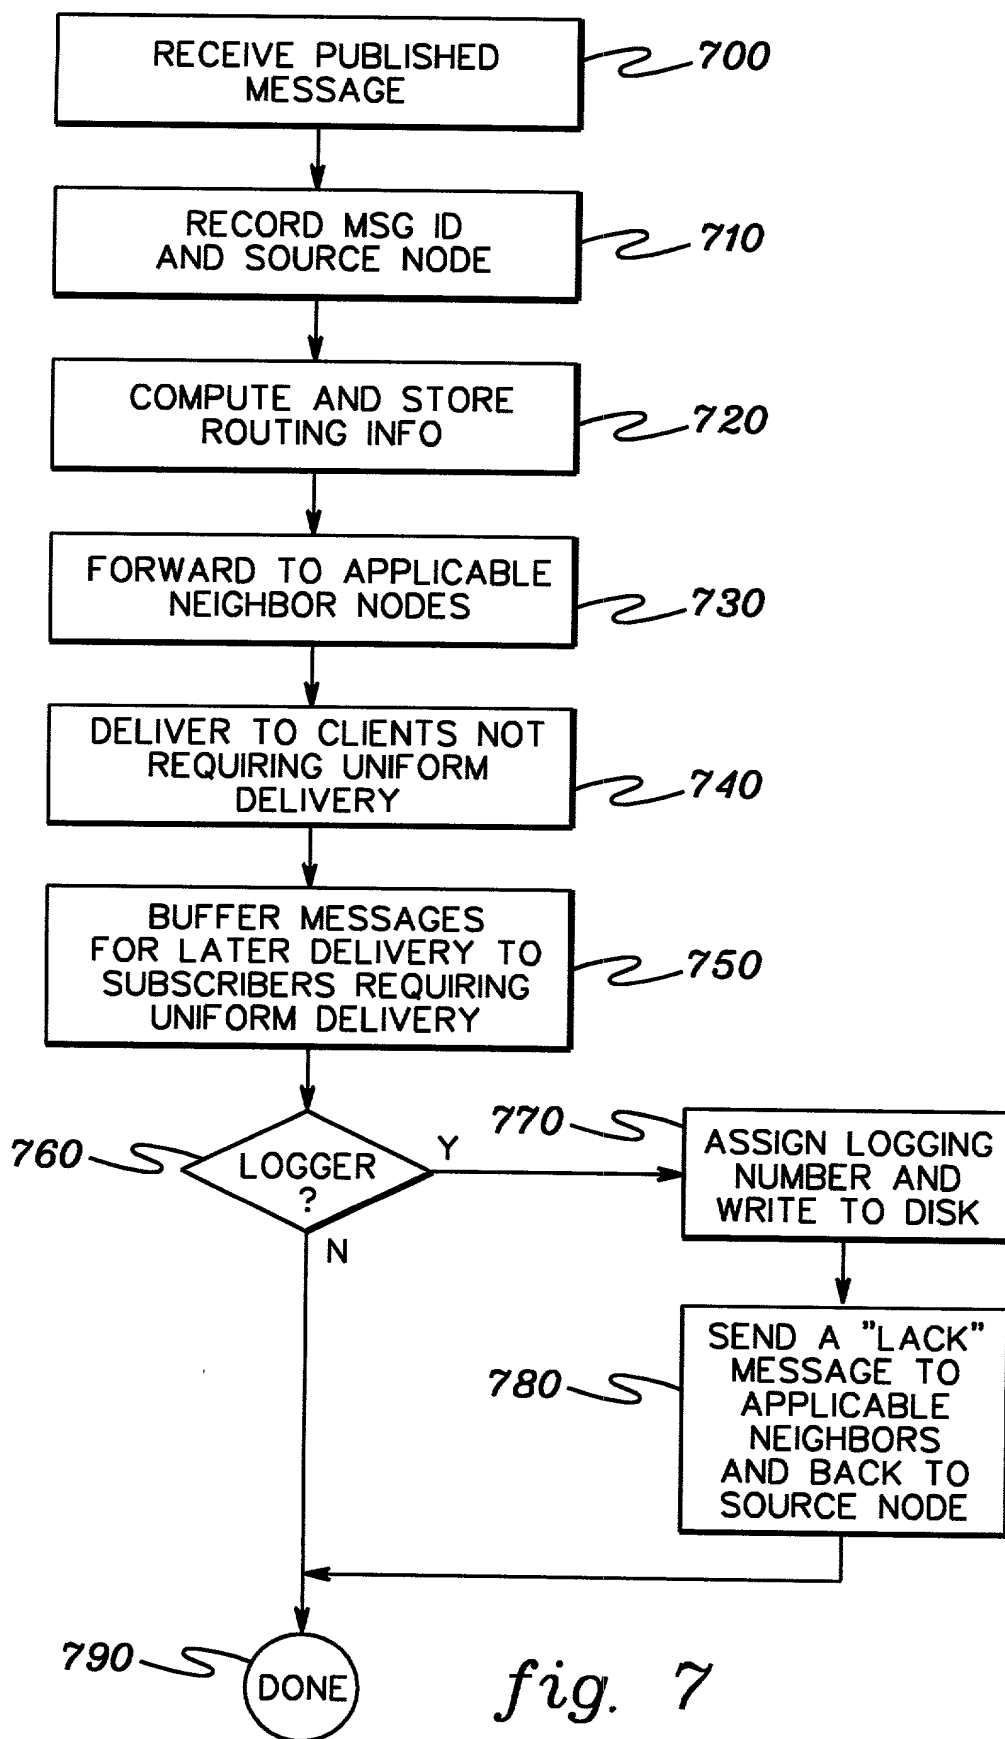




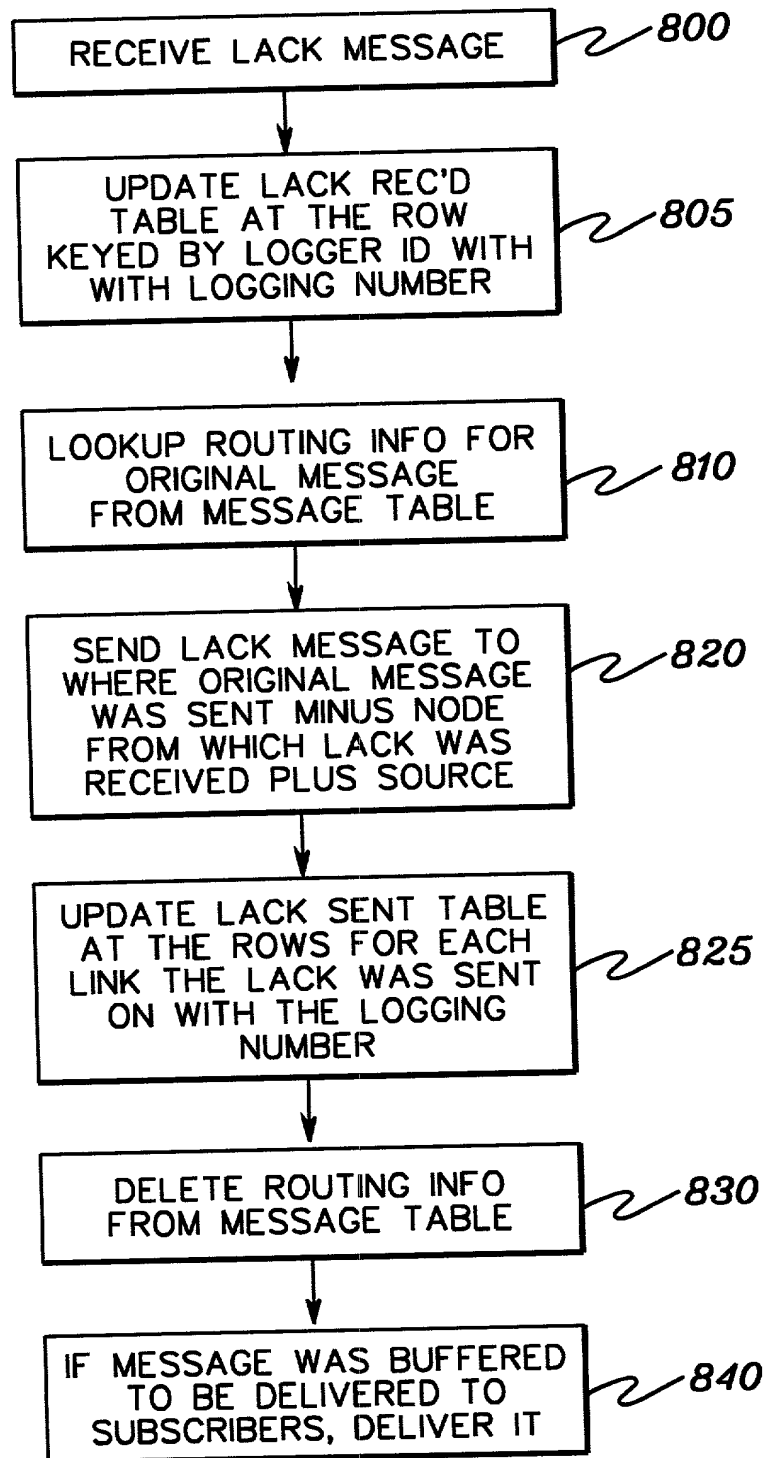


*fig. 8*

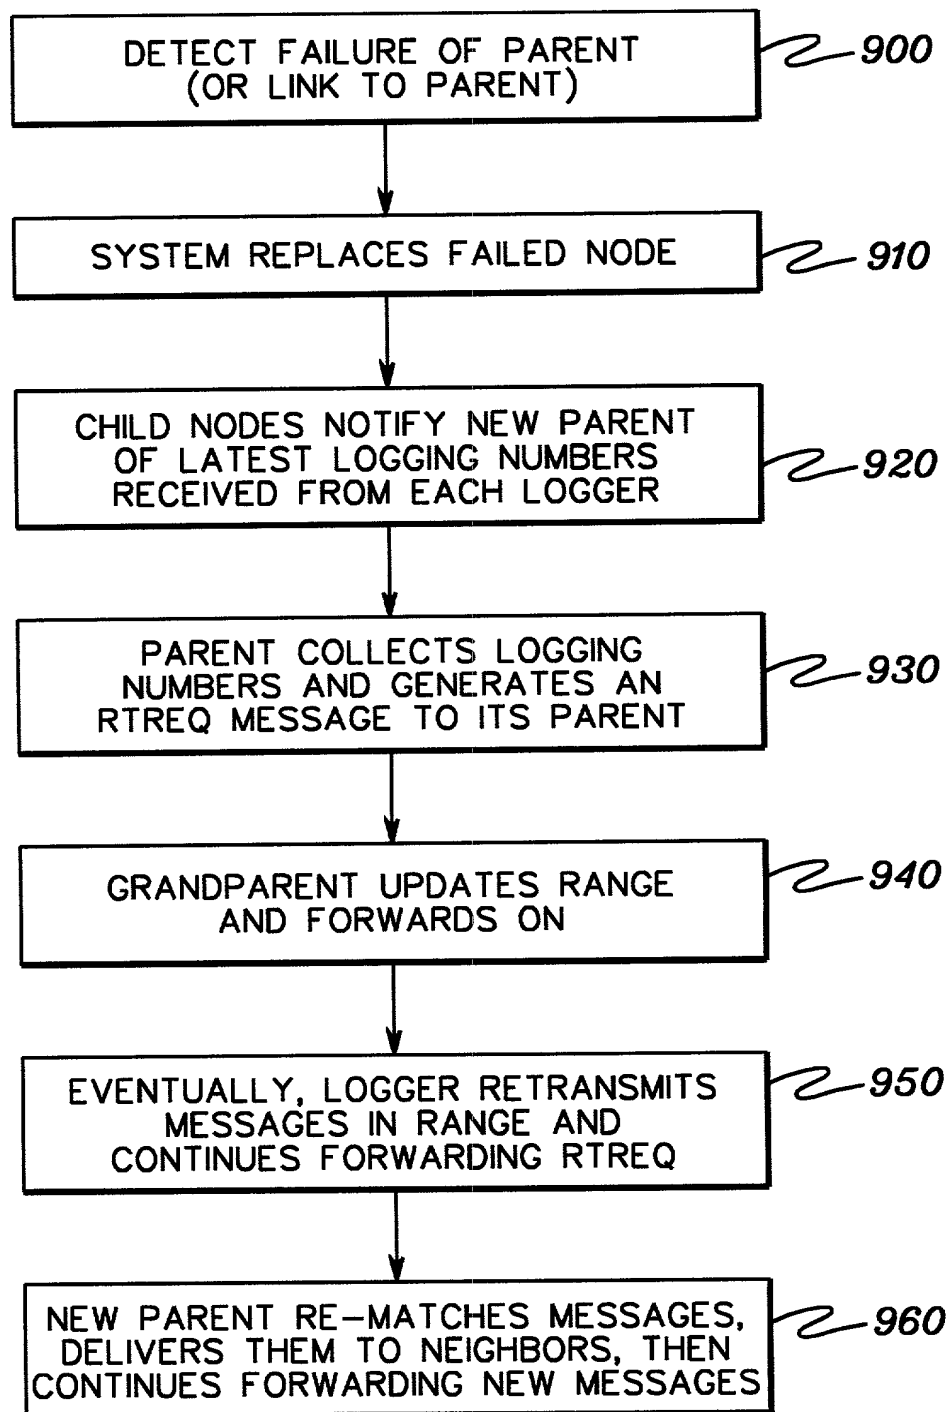

*fig. 9*

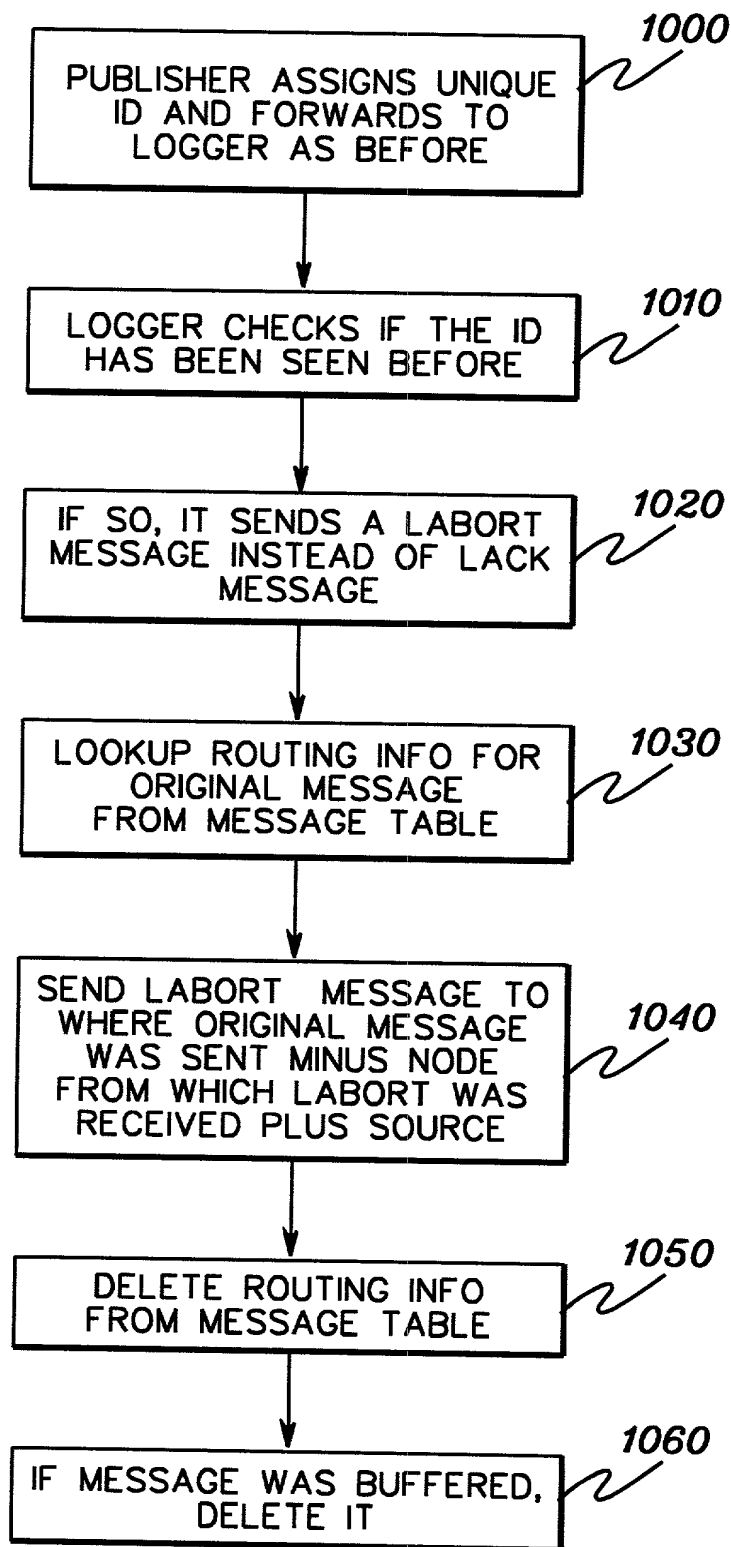

*fig. 10*

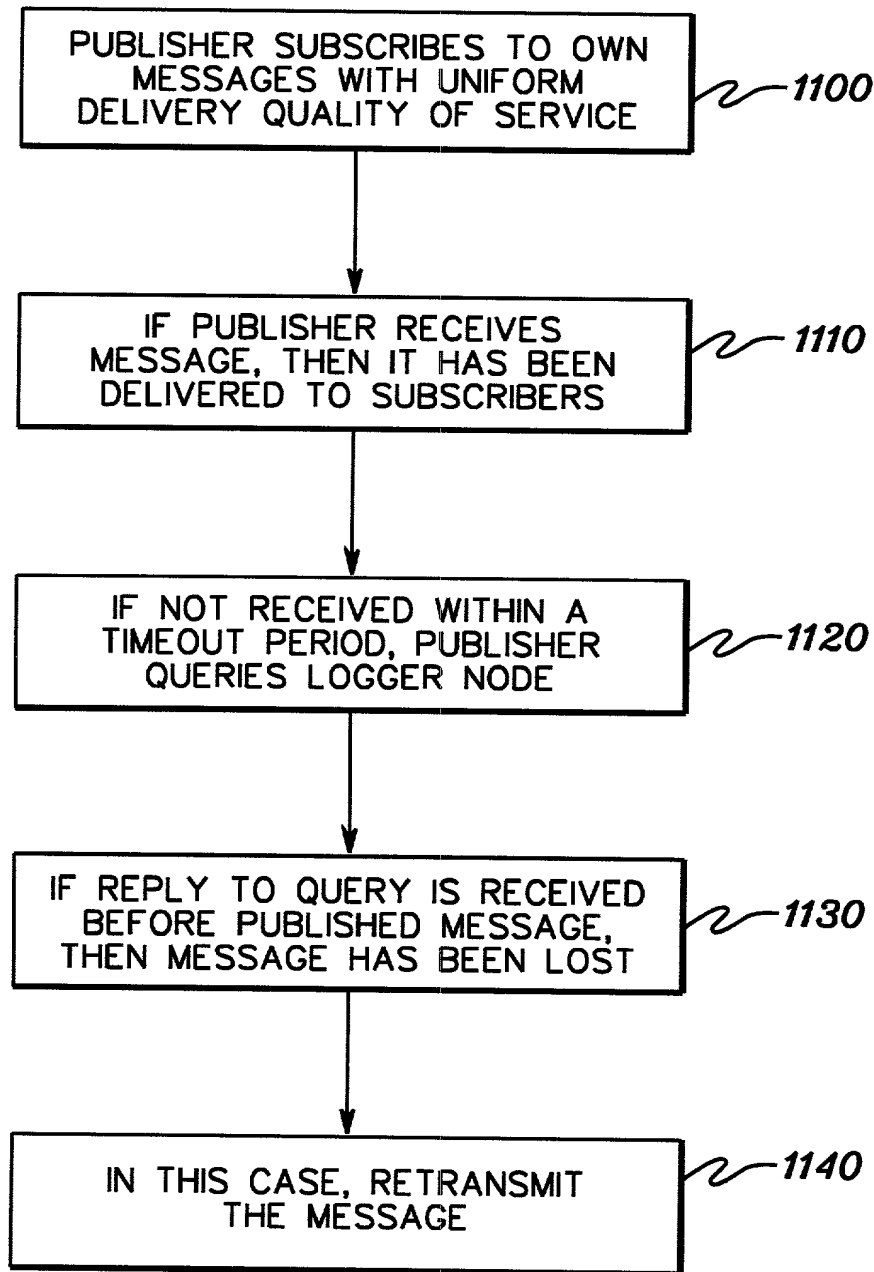

*fig. 11*

Docket No.  
YO998-525

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### MESSAGE LOGGING FOR RELIABLE MULTICASTING ACROSS A ROUTING NETWORK

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Manny W. Schechter (Reg. 31,722)

Daniel P. Morris (Reg. 32,053)

Terry J. Ilardi (Reg. 29,936)

Douglas W. Cameron (Reg. 31,596)

Christopher A. Hughes (Reg. 26,914)

Paul J. Otterstedt (Reg. 37,411)

Edward A. Pennington (Reg. 32,588)

John E. Hoel (Reg. 26,279)

Joseph C. Redmond, Jr. (Reg. 18,753)

Kevin M. Jordan (Reg. 40,277)

Stephen C. Kaufman (Reg. 29,551)

Jay P. Sbröllini (Reg. 36,266)

David M. Shofi (Reg. 39,835)

Robert M. Trepp (Reg. 25,933)

Send Correspondence to: Kevin P. Radigan, Esq.  
HESLIN & ROTHENBERG, P.C.  
5 Columbia Circle  
Albany, NY 12203

Direct Telephone Calls to: (name and telephone number)  
Kevin P. Radigan, Esq. (518) 452-5600

Full name of sole or first inventor

**GURUDUTH SOMASEKHARA BANAVAR**

Sole or first inventor's signature

*Guruduth Somasekhara Banavar*

Date

*Mar 24, 1999*

Residence

**3148 Gomer Street, Yorktown Heights, NY 10598**

Citizenship

**India**

Post Office Address

**3148 Gomer Street, Yorktown Heights, NY 10598**

Full name of second inventor, if any

**TUSHAR DEEPAK CHANDRA**

Second inventor's signature

*Tushar Deepak Chandra*

Date

*March 25 '99*

Residence

**320 East 46th Street, Apt. 31H, New York, NY 10017**

Citizenship

**India**

Post Office Address

**320 East 46th Street, Apt. 31 H, New York, NY 10017**

Full name of third inventor, if any <b>KEVAN LEE MILLER</b>
Third inventor's signature <i>Kevan Lee Miller</i> Date <i>March 24, 1999</i>
Residence <b>3 Kilian Drive, Danbury, CT 06811</b>
Citizenship <b>United States of America</b>
Post Office Address <b>3 Kilian Drive, Danbury, CT 06811</b>

Full name of fourth inventor, if any <b>ROBERT EVAN STROM</b>
Fourth inventor's signature <i>Robert Evan Strom</i> Date <i>March 24, 1999</i>
Residence <b>6 Rochambeau Avenue, Ridgefield, CT 06877</b>
Citizenship <b>United States of America</b>
Post Office Address <b>6 Rochambeau Avenue, Ridgefield, CT 06877</b>

Full name of fifth inventor, if any <b>DANIEL CHARLES STURMAN</b>
Fifth inventor's signature <i>Daniel Charles Sturman</i> Date <i>March 24, 1999</i>
Residence <b>408 Knickerbocker Road, Englewood, NJ 07631</b>
Citizenship <b>United States of America</b>
Post Office Address <b>408 Knickerbocker Road, Englewood, NJ 07631</b>

Full name of sixth inventor, if any <b>MICHAEL JAMES WARD</b>
Sixth inventor's signature <i>Michael James Ward</i> Date <i>March 24, 1999</i>
Residence <b>25 West Park Avenue, New Haven, CT 06511</b>
Citizenship <b>United States of America</b>
Post Office Address <b>25 West Park Avenue, New Haven, CT 06511</b>



## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Banavar et al.

Serial No.:

Group Art Unit:

Filed:

Examiner:

Title: MESSAGE LOGGING FOR RELIABLE MULTICASTING  
ACROSS A ROUTING NETWORK

APPOINTMENT OF ASSOCIATE ATTORNEY

To: Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The undersigned attorney, who is an attorney in the Combined Declaration and Power of Attorney for the above-identified application, hereby appoints Jeff Rothenberg, Esq., Reg. No. 26,429, Kevin Radigan, Esq., Reg. No. 31,789, and Blanche E. Schiller, Esq., Reg. No. 35,670, of Heslin & Rothenberg, P.C., 5 Columbia Circle, Albany, New York 12203 (telephone number 518-452-5600) as his associate attorneys to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith.

YO998-525

-1-

MAR. -19' 99 (FRI) 12:16

HESLIN & ROTHENBERG

TEL. 518 452 5579

P 008

Please direct all official communications to Kevin P. Radigan at the address cited above.

Respectfully submitted,

Kevin M. Jordan, Esq. - Attorney  
Reg. No.: 40,277  
Tel. No.: (914) 945-2120

IBM Corporation  
Intellectual Property Law Dept.  
T.J. Watson Research Center  
P.O. Box 218  
Yorktown Heights, NY 10598

[illegible]

Y0998-525

- 2 -